




**CERTIFICATION & SUBMITTAL
 MODEL 3600
 Fabric Blade Backdraft Dampers**

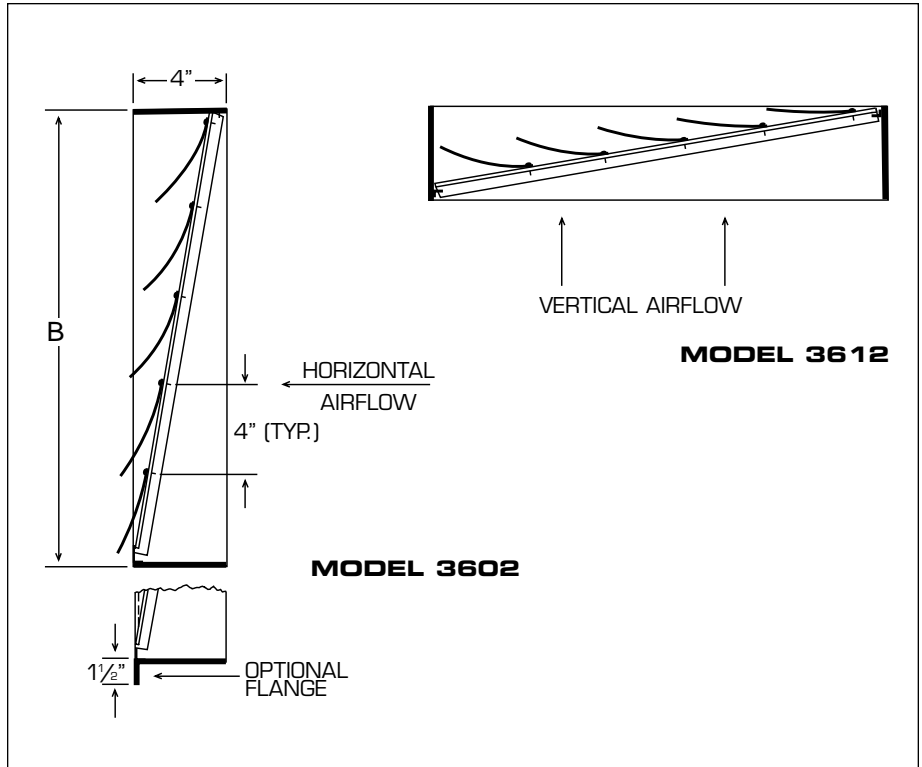

STANDARD SPECIFICATIONS

- **FRAME:** 18 gauge galvanized steel.
- **BLADES:** Double-coated neoprene fabric
- **BIRDSCREEN:** 19 gauge 1/2" x 1/2" galvanized steel.
- **FINISH:** Standard Mill.
- **MAX. SINGLE SECTION:** 32" x 32".
- **MIN. SINGLE SECTION:** 4" x 4"
- **MAXIMUM VELOCITY:** 1000 F.P.M.
- **MAX. TEMPERATURE:** 250°F.

OPTIONS

- 31 Flange, 1-1/2" fastened to damper frame (air leaving side).
- 86 Aluminum Construction.

NOTES

1. A & B are opening dimensions. Unless specified otherwise, shutters are made 1/4" undersize.
2. "A" dimension is width of opening measured parallel to the blades.

CERTIFICATION & SUBMITTAL
MODEL 3600
Fabric Blade Backdraft Dampers

This performance information is derived from testing in accordance with AMCA Standard 500; with set up figure 5.3 (pressure drop).

AIRFLOW CHART

