




**CERTIFICATION & SUBMITTAL
 MODEL 8110 ROOF CURBS
 STANDARD 3" - 45° CANT**

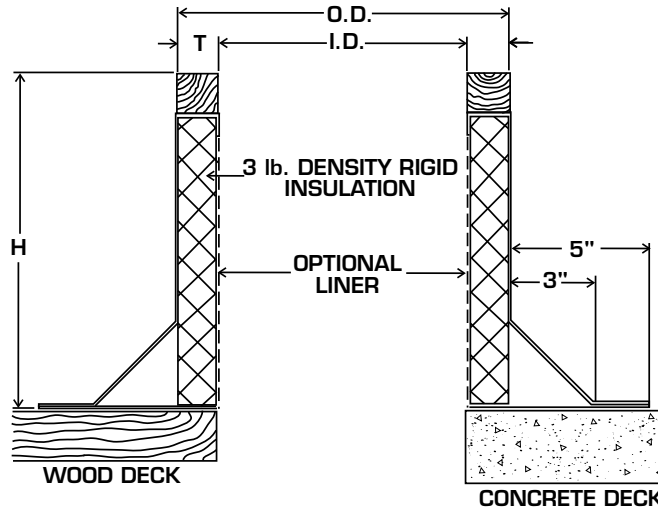

STANDARD SPECIFICATIONS

- **SHELL & BASE PLATE:** 18 ga. galvanized press formed steel. Continuous welds on shell seams.
- **INSULATION:** 3 lb. per cu. ft. density, rigid fiberglass.
- **WOOD NAILER:** Fir, factory installed
- **AVAILABLE "T"** MODEL 8111: 1-1/2" - standard.
- **DIMENSIONS:** MODEL 8113: 3-1/2".
MODEL 8115: 5-1/2".

OPTIONS

- 52 No nailer
- 53 Treated wood nailer
- 54 Oversized wood nailer
- 55 Neoprene gasket 1 1/2" or 2" x 1/4" (please specify)
- 60 18 ga. galvanized liner
- 61 .063" Aluminum liner
- 62 Damper holding base
- 63 Burglar Bars 1/2" diameter
- 65 One way pitch
- 66 Two way pitch
- 71 Pipe curb assembly (accommodates 2 pipes 3/8" thru 1" and 2 pipes 1" thru 2")
- 72 Pipe curb assembly (accommodates single pipe 2" thru 6")
- 81 16 ga. construction
- 82 14 ga. construction
- 86 Aluminum construction

NOTES

1. MINIMUM RECOMMENDED "H" = 8"
2. Large units, depending on freight requirements are shipped knocked down in multiple sections for field assembly.

